



# HYDROPROGREEN™




## Sturdy self-priming external pumps with integral strainer pot

| PUMP    | POWER              |                  | m <sup>3</sup> /h flow at the following heads (metres) |      |      |      |      |      |      |    |    |    | SRP Sept 2008 |                |
|---------|--------------------|------------------|--|------|------|------|------|------|------|----|----|----|---------------|----------------|
|         | Nominal Horsepower | KW <sup>P2</sup> | 2  | 4    | 6    | 8    | 10   | 11   | 12   | 14 | 16 | 17 | Ex. VAT       | Inc. 17.5% VAT |
| HPS25   | 0.25               | 0.18             | 13.2   | 12.5 | 9.5  | 6.3  | 4    |      |      |    |    |    | £246.75       | £289.93        |
| HPS33   | 0.33               | 0.24             | 18.9   | 17   | 14   | 11   | 7    | 4    |      |    |    |    | £266.70       | £313.37        |
| HPS50*  | 0.50               | 0.37             | 21   | 18.5 | 16   | 12   | 9    | 7    | 4.2  |    |    |    | £287.70       | £338.05        |
| HPS75*  | 0.75               | 0.55             |  | 21   | 18.5 | 15   | 12   | 10   | 7.5  | 2  |    |    | £306.60       | £360.25        |
| HPS100* | 1.0                | 0.74             |  | 25   | 22   | 19.5 | 17   | 15   | 13   | 8  | 2  |    | £338.10       | £397.27        |
| HPS150* | 1.5                | 1.10             |  | 28   | 25   | 22   | 19.5 | 18.5 | 17.5 | 12 | 7  | 4  | £397.95       | £467.59        |

All pumps are 50Hz/220v single phase (\* three phase versions also available on these models - to special order)

- Efficient high-performance output
- Ultra low-noise operation
- Includes dismountable fittings to 1.5" and 50mm pressure pipe
- Fast-opening translucent lid
- Stainless-Steel shaft and Noryl impellor

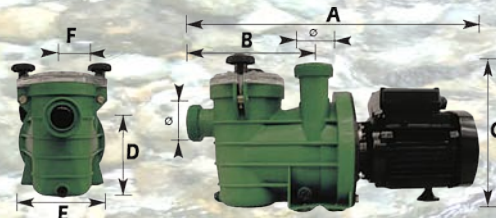

### DIMENSIONS (mm)

B - 219; C - 236; D - 147; E - 137; F - 58

Inlet/Outlet Dia. - 50mm & 1.5" fittings


HPS25-75: A - 474; Weight 8.5kg net/9.5kg gross

HPS100-150: A - 500; Wt 11.5kg net/12.5kg gross

For ventilation allow a minimum 150mm gap behind the motor unit

Motor is IP55 - Class F - continuously rated

Pumps can be used with fresh or salt water

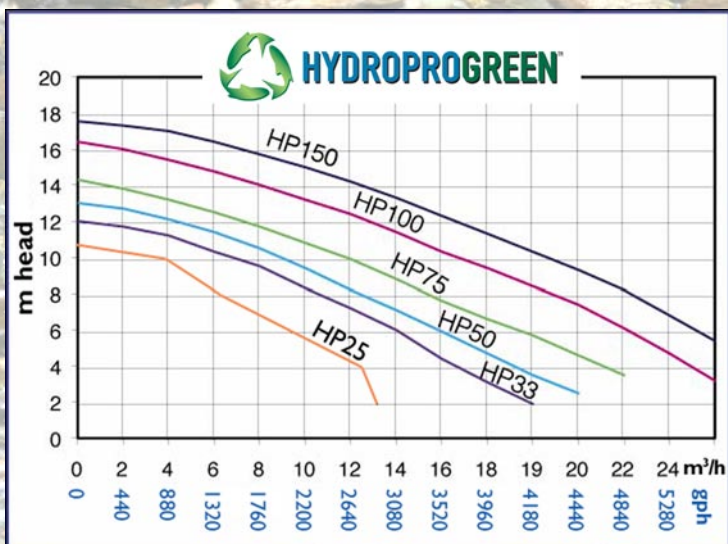

## AQUATICA

INTERNATIONAL LTD

020 8669 6643

fax 020 8773 2035

info@bubblebeadfilters.co.uk

www.hydroprogreen.co.uk

See your fish differently...™