



HYDROPROGREEN™




Sturdy self-priming external pumps with integral strainer pot

PUMP	POWER		m ³ /h flow at the following heads (metres)										SRP Sept 2008	
	Nominal Horsepower	KW ^{P2}	2	4	6	8	10	11	12	14	16	17	Ex. VAT	Inc. 17.5% VAT
HPS25	0.25	0.18	13.2	12.5	9.5	6.3	4						£246.75	£289.93
HPS33	0.33	0.24	18.9	17	14	11	7	4					£266.70	£313.37
HPS50*	0.50	0.37	21	18.5	16	12	9	7	4.2				£287.70	£338.05
HPS75*	0.75	0.55		21	18.5	15	12	10	7.5	2			£306.60	£360.25
HPS100*	1.0	0.74		25	22	19.5	17	15	13	8	2		£338.10	£397.27
HPS150*	1.5	1.10		28	25	22	19.5	18.5	17.5	12	7	4	£397.95	£467.59

All pumps are 50Hz/220v single phase (* three phase versions also available on these models - to special order)

- Efficient high-performance output
- Ultra low-noise operation
- Includes dismountable fittings to 1.5" and 50mm pressure pipe
- Fast-opening translucent lid
- Stainless-Steel shaft and Noryl impellor

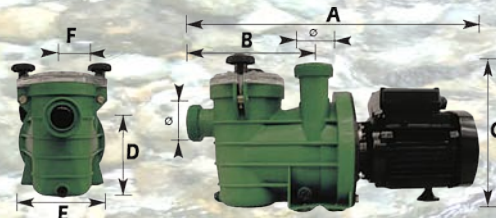

DIMENSIONS (mm)

B - 219; C - 236; D - 147; E - 137; F - 58

Inlet/Outlet Dia. - 50mm & 1.5" fittings


HPS25-75: A - 474; Weight 8.5kg net/9.5kg gross

HPS100-150: A - 500; Wt 11.5kg net/12.5kg gross

For ventilation allow a minimum 150mm gap behind the motor unit

Motor is IP55 - Class F - continuously rated

Pumps can be used with fresh or salt water

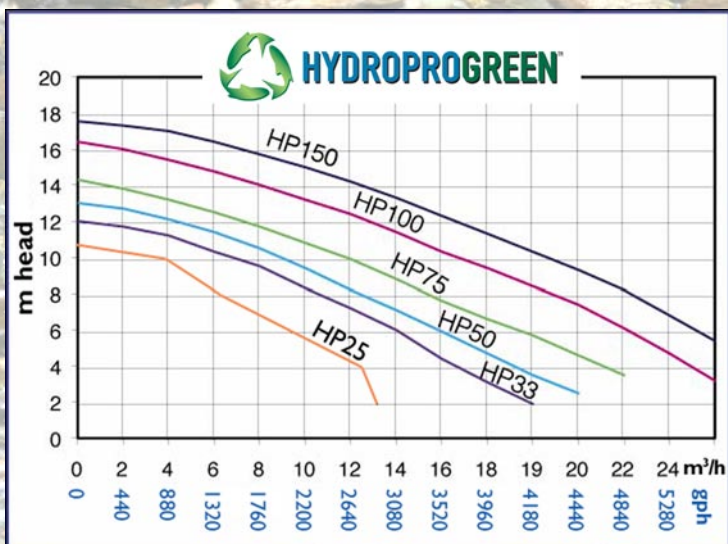

AQUATICA

INTERNATIONAL LTD

020 8669 6643

fax 020 8773 2035

info@bubblebeadfilters.co.uk

www.hydroprogreen.co.uk

See your fish differently...™